

Squashni er en elektronisk alarmgiver som i mange tilfeller kan benyttes i stedet for alarmklokker. Alarmgiveren gir en kosteffektiv installasjon ved å kunne benyttes som monteringssockel for detektorer. Alarmgiveren kan også benyttes uten detektor, og leveres da med deksel over monteringshullene for detektorsokkelen.

Ved installasjon sammen med detektor vil man kunne benytte en enkelt 4-leder kabel, istedet for separate kabler for detektorsløyfe og alarmkurs.

- Estetisk design.
- Tak eller veggmontering.
- Monteringssockel for detektor.
- Deksel for bruk som selvstendig enhet.
- IP65.
- Volumkontroll.
- 32 valgfrie signaltoner.

Squashni is an electronic alarm device, mainly used as an alternative to alarm sounders. The alarm device allows a cost-effective installation, as the device can also be used as a base for a detector. The alarm device can be used without a detector, in which case it is provided with a cover protecting the mounting holes. When the device is mounted with a detector, a single 4-wire cable is used, instead of separate cables for detection loops and alarm outputs.

- *Ultra-slim profile & pleasing design for unobtrusive installation.*
- *Ceiling or wall mounting fixing points.*
- *Fixing platform for detector bases.*
- *Blank cover version for use as a normal stand-alone room sounder.*
- *IP 65.*
- *Volum control*
- *32 tones user selectable*



Dimensjoner / Dimensions

ØxD : 112 x 30mm
Vekt / Weight : 150g
Materiale / Materials : ABS plast / ABS plastic
Farge / Colour : Hvit / White
Rød / Red
Lydnivå / Sound Output
24V DC : 93dBA/1m (tone 3)
Arbeidsspenning /
Operation voltage : 9 - 28V DC
Strømforbruk /
Current Consumption
24V DC : 18mA (tone 3)
Temperatur / Temperature :- 25 til +70°C
- 25 to +70°C
Beskyttelsesgrad /
Degree of protection : IP 65

Service / Service :Utskiftes ved feil /
Replace if faulty

Dimensjoner / Dimensions

Tilkobling / Connection:

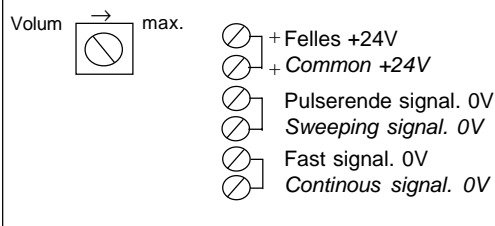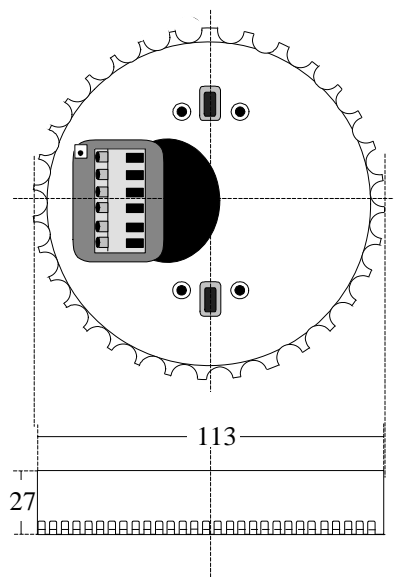

Bestillingsnr.: / Ordering no:

Squashni rød/red: 7770-009.0012
Squashni hvit/white: 7770-009.0010
Lokk/coverplate rød/red: 7770-009.0013
Lokk/coverplate hvit/white: 7770-009.0011

Autronica Fire and Security AS

Fire and Security, Trondheim, Norway. Phone: + 47 73 58 25 00, fax: + 47 73 58 25 01.

Oil & Gas, Stavanger, Norway. Phone: + 47 51 84 09 00, fax: + 47 51 84 09 99.

Autronica Industrial Ltd., Watford, United Kingdom. Phone: 1923 23 37 68, fax: 1923 22 55 77.

Visit Autronica Fire and Security's Web site: autronicafire.com